

SUREFLOW® C50

NON CLEAN, SEWAGE & WASTEWATER COMBINATION AIR VALVE



C50-P



C50-J



C50-C



C50-G



C50-N

DESCRIPTION

BERMAD C50 is a high quality combination air valve for a variety of sewage and wastewater networks and operating conditions. It evacuates air during pipeline filling, allows efficient release of air and gas pockets from pressurized pipes, and enables large volume air intake in the event of network draining.

The elongated body and lower float prevent the fluid to be in contact with the upper mechanism.

With its advanced aerodynamic design, double orifice and Surge Protection device (optional), this valve provides excellent protection against air and gas accumulation and vacuum formation with improved sealing under low pressure conditions.

FEATURES & BENEFITS

Straight flow body with large diameter automatic orifice: Higher than usual air flow.

Aerodynamic, full-body kinetic shield: Prevents premature closing without disturbing air intake or discharge.

Dynamic Sealing: Prevents leakage under low pressure conditions (0.8 psi; 0.05 bar).

Elongated body design: Prevents solids from making contact with valve's operating parts.

Compact, simple and reliable structure with fully corrosion-resistant internal parts: Lower maintenance and increased life span.

Two service ports: Enabling back flushing and drainage.

Threaded Side outlet (2"; DN50) for connection of Surge Protection (SP) or Inflow prevention (IP) devices.

Factory approval and Quality Control: Performance and specification tested and measured with specialized test bench, including vacuum pressure conditions.

ADDITIONAL FEATURES & ACCESSORIES

Surge Protection (code SP): Smoother operation, preventing damage to the valve and the system.

Inflow Prevention (code IP): Prevents intake of atmospheric air in cases where this could lead to damaged pumps, required re-priming, or disruption of siphon.

Drainage Valve (code Z).

TYPICAL APPLICATIONS

Pumping stations: Air relief and vacuum prevention.

Non Clean Water pipelines: Protection against air and gas accumulation and vacuum formation at elevations, slope change points and at road/river crossings.

Wastewater Treatment plants: Air relief, protection against air and gas accumulation and vacuum formation.

SUREFLOW® C50

NON CLEAN, SEWAGE & WASTEWATER COMBINATION AIR VALVE

INLET AND OUTLET CONNECTIONS

Inlets:

Glass-reinforced Nylon Body (C50-P): male threaded 2-3"; DN50-80, flanged 2-4"; DN50-100

Ductile Iron Body (C50-C, C50-J): male threaded 2"; DN50, flanged 2-3"; DN50-80

Stainless Steel Body (C50-G, C50-N): male threaded 2-3"; DN50-80, flanged 2-3"; DN50-80

Outlets: Sideways, female threaded 2"; DN50

OPERATIONAL DATA

Pressure Rating: 150 psi; ISO PN10 (C50-P), 230 psi; ISO PN16 (C50-C, C50-J, C50-G, C50-N)

Minimum operating pressure: 0.8 psi; 0.05 bar

Maximum operating pressure: 150 psi; 10 bar (C50-P), 230 psi; 16 bar (C50-C, C50-J, C50-G, C50-N)

Media and operating temperature: Water, 33-140°F; 1-60°C

MATERIALS

Body, Neck and Cover:

Glass-Reinforced Nylon (C50-P)

Ductile Iron (C50-C)

Stainless Steel 316 (C50-N)

Ductile Iron body with Glass-reinforced Nylon neck and cover (C50-J)

Stainless Steel 316 body with Glass-reinforced Nylon neck and cover (C50-G)

Upper Float Assembly: Polypropylene, Glass-Reinforced Nylon.

Lower Float Assembly: Polypropylene, Optional – Stainless Steel 316.

Float Rod: Stainless Steel 316

Elastomers: EPDM, NBR. Optional – Viton.


Coating of Ductile Iron: Fusion Bonded Epoxy

ORIFICES SPECIFICATION


Inlet Sizes	Automatic Orifice	Kinetic Orifice		Surge Protection		
	Area	Diameter	Area	Number of holes	Hole Diameter	Total Area
Inch	Sq inch	inch	Sq inch	--	inch	Sq inch
mm	Sq mm	mm	Sq mm		mm	Sq mm
2"-4"	0.019	1.772	2.465	4	0.157	0.078
DN50-DN100	12.2	45.0	1,590		4	50

AIR FLOW PERFORMANCE CHARTS

Air Relief and Intake (Pipeline Filling, Draining and Vacuum Conditions)

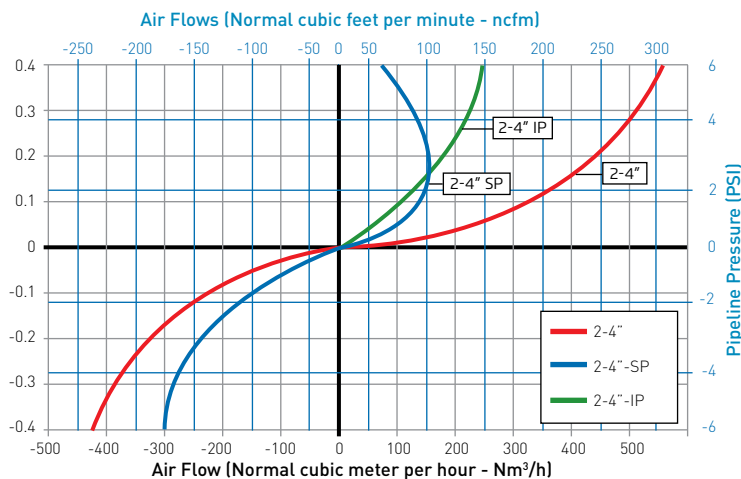

Air Release (Pressurized Operation)


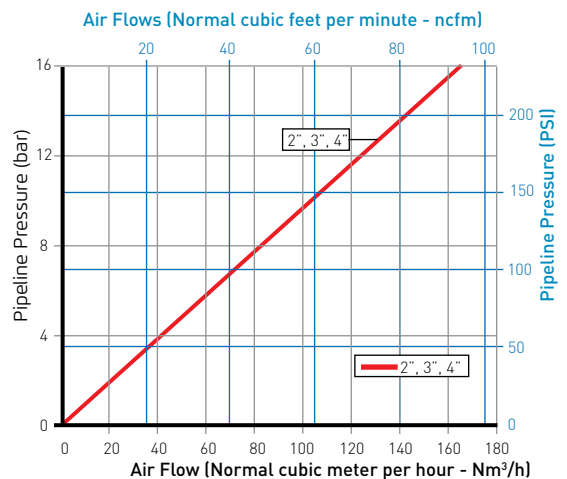


Air relief and intake charts are based on actual measurements, measured in Bermad Air Flow test bench, according to EN-1074/4 standard and refer to Side outlet. Use Bermad Air software for optimized Sizing & Positioning of Air Valves.


SUREFLOW® C50

NON CLEAN, SEWAGE & WASTEWATER COMBINATION AIR VALVE

CUTAWAY - GLASS-REINFORCED NYLON BODY (C50-P)

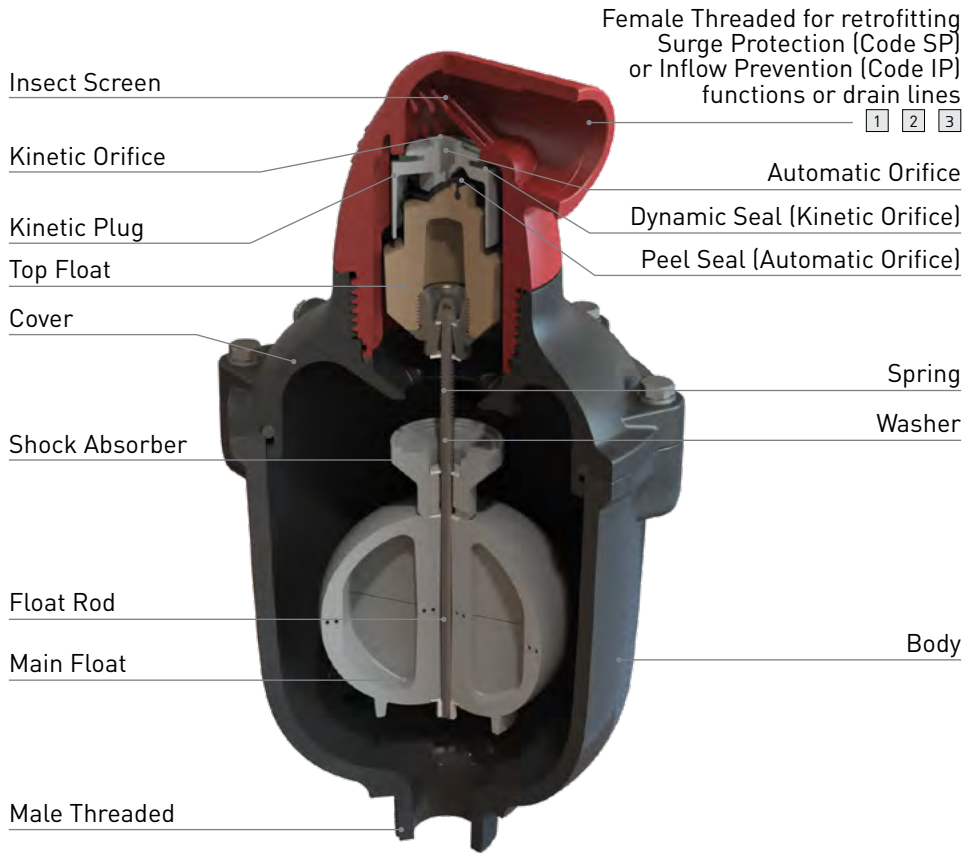

Surge Protection (code C50-SP)




Inflow Prevention (code C50-IP)



Extension with downwards outlet

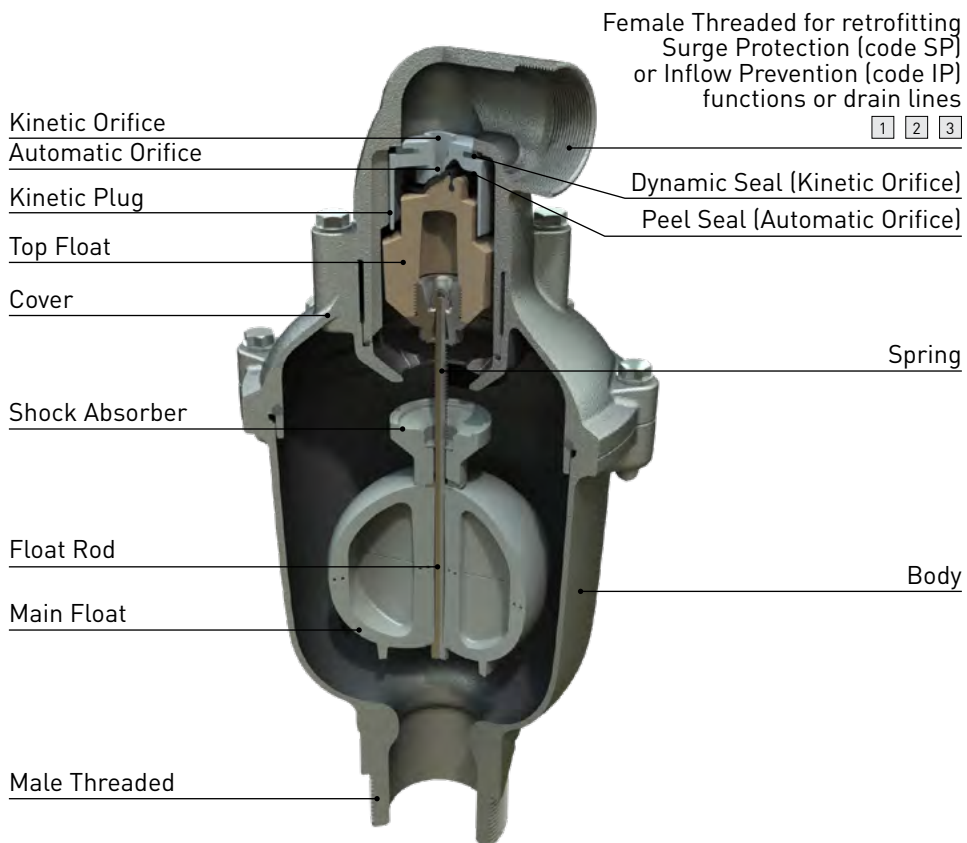


CUTAWAY - STAINLESS STEEL BODY (C50-N)






SUREFLOW® C50

NON CLEAN, SEWAGE & WASTEWATER COMBINATION AIR VALVE

DIMENSIONS & WEIGHTS

										
Inlet Size	Connection	Glass Reinforced Nylon (C50-P)			Ductile Iron (C50-C)			Ductile Iron & Glass Reinforced Nylon (C50-J)		
		Width (D)	Height (H)	Weight	Width (D)	Height (H)	Weight	Width (D)	Height (H)	Weight
inch		inch	inch	lbs	inch	inch	lbs	inch	inch	lbs
mm		mm	mm	Kg	mm	mm	Kg	mm	mm	Kg
2"	Threaded	13.740	17.638	12.78	9.449	19.291	45.2	9.449	19.094	26.4
DN50		349	448	5.8	240	490	20.5	240	485	12.0
2"	Flanged	13.740	19.134	14.11	9.449	19.035	49.1	9.449	18.937	30.2
DN50		349	486	6.4	240	484	22.3	240	481	13.7
3"	Threaded	13.740	20.157	13.00	---	---	---	---	---	---
DN80		349	512	5.9	---	---	---	---	---	---
3"	Flanged	13.740	19.409	14.83	9.449	19.291	52.5	9.449	19.291	33.5
DN80		349	493	6.7	240	490	23.8	240	490	15.2
4"	Flanged	13.740	19.409	15.32	---	---	---	---	---	---
DN100		349	493	7.0	---	---	---	---	---	---

							
Inlet Size	Connection	Stainless Steel & Glass Reinforced Nylon (C50-G)			Stainless Steel (C50-N)		
		Width (D)	Height (H)	Weight	Width (D)	Height (H)	Weight
inch		inch	inch	lbs	inch	inch	lbs
mm		mm	mm	Kg	mm	mm	Kg
2"	Threaded	13.740	19.134	23.36	11.654	19.252	37.03
DN50		349	486	10.6	296	489	16.8
2"	Flanged	13.740	19.134	29.09	11.654	19.370	41.66
DN50		349	486	13.2	296	492	18.9
3"	Threaded	13.740	20.197	28.65	11.654	20.197	41.88
DN80		349	513	13.0	296	513	19.0
3"	Flanged	13.740	19.409	35.70	11.654	19.843	48.27
DN80		349	493	16.2	296	504	21.9
4"	Flanged	---	---	---	---	---	---
DN100		---	---	---	---	---	---

VIADUX WATER NETWORK SYSTEMS

VIADUX.COM.AU

PHONE 1300 VIADUX (842 389)

All Viadux trademarks and logos are owned by Viadux Pty Ltd. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Viadux reserves the right to change specifications without prior notice. AVC601507