

Model: MJ3057 Flange Adaptor

- Suitable for all kinds of pipe material
- Suitable for water and gas
- Ductile cast iron GGG45 body and clamping ring(s), acc. to EN-GJS-450-10
- RESICOAT® epoxy powder coating, according to GSK standards and EN 14901
- NBR gasket, acc. to EN 682 and AS4020 (-5°C up to +50°C)
 - EPDM gasket acc. to EN 681-1 (0°C up to +50°C) by request
- Angular deflection of max. 8° per socket at installation (based on the middle of the range)
- Stainless steel A4 quality (AISI 316) Uni/Fiksers
- Stainless steel A4 quality (AISI 316) bolts, nuts and washers standard or A2 quality (AISI 304) by request
- Hygiene protection included DN50 - DN1025

Installation instruction:

- Read the user manual
- For restraint versions, on plastic pipes, the use of an insert stiffener (see accessories) is mandatory, check our technical information
- Please note, when using a MULTI/JOINT® DN625 till DN1025 on plastic pipes, the use of the insert stiffener MJ DN625 - DN1025 (see accessories) is mandatory
- * DN350 & DN400 for plastic pipe materials = PN 10 bar water / MOP 5 bar gas

Note:

ID min. = minimum insertion depth

DN625 - DN1025 for water applications only

Reece Code	+GF+ WAGA NBR/A4	DN (mm)	Range 1 (mm)	Flange 3 (mm)	Drilling pattern	No. of bolt holes flange	a (mm)	b (mm)	ID min. (mm)	e (mm)	PN Water (bar)	MOP Gas (bar)	Weight (kg)
3714031	709355010	50	46 - 71	50	PN16	4	165 - 187	170	84	3xM12	16	8	4.700
3714032	709355012	65	63 - 90	60/65	PN16	4	170 - 193	191	84	3xM12	16	8	5.700
3714033	709355014	80	84 - 105	80	PN16	8	170 - 192	210	84	3xM12	16	8	6.800
3714034	709355016	100	104 - 132	100	PN16	8	173 - 199	241	90	3xM16	16	8	8.000
1026997	709355018	125	132 - 155	125	PN16	8	192 - 215	270	90	4xM16	16	8	10.200
3714036	709355020	150	154 - 192	150	PN16	8	211 - 248	312	110	4xM16	16	8	14.200
3714037	709355024	200	192 - 232	200	PN10/PN16	8/12	221 - 258	371	110	6xM16	16	8	23.600
3714038	709355028	250	267 - 310	250	PN10/PN16	12	264 - 307	445	130	6xM20	16	8	31.600
3714039	709355032	300	315 - 356	300	PN10/PN16	12	293 - 331	495	130	8xM20	16	8	44.100
3714040	709355036	350	352 - 393	350	PN10/PN16	16	291 - 336	534	130	8xM20	16*	8*	51.000
3714041	709355038	400	392 - 433	400	PN10/PN16	16	297 - 342	580	135	10xM20	16*	8*	62.100
3714042	709355072	450	450 - 482	450	PN10/PN16	20	330 - 367	641	160	10xM20	10	5	77.300
3714043	709355074	500	500 - 532	500	PN10/PN16	20	332 - 369	715	160	10xM20	10	5	91.600
3714044	709355078	600	605 - 637	600	PN10/PN16	20	339 - 377	840	170	14xM20	10	5	117.700
1026813	709355282	700	709 - 741	700	PN10/PN16	24	434 - 464	940	210	16xM20	10	-	187.000
1026814	709355283	800	799 - 831	800	PN10/PN16	24	431 - 461	1030	210	20xM20	10	-	216.200
3714045	709355301	900	899 - 931	900	PN10/PN16	28	474 - 504	1130	210	22xM20	10	-	247.000
3714046	709355302	1000	994 - 1026	1000	PN10/PN16	28	474 - 504	1255	210	24xM20	10	-	290.000


Certifications:

AS4020 - NBR & EPDM drinking water contact approved
WSAA – PA 1428
EN 14525:2022



Available at Reece. Call 1800 032 566 or visit reece.com.au/storefinder for your nearest store

Disclaimer:
All Reece trademarks and logos are owned by Reece Group Pty Ltd. All other brand or product names are trademarks or registered marks of their respective owners and displayed by agreement. Because we are continuously improving our products and services, Reece reserves the right to change specifications without prior notice.

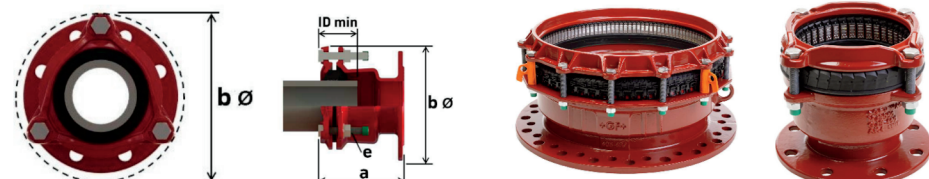

Water & Gas..... WAGA

One size fits and grips all