

Model: MJ3057/MJ3157 Table D

Flange (Reduced) Adaptor

- Suitable for all kinds of pipe material
- Suitable for water and gas
- Ductile cast iron GGG45 body and clamping ring(s), acc. to EN-GJS-450-10
- RESICOAT® epoxy powder coating, according to GSK standards and EN 14901
- NBR gasket, acc. to EN 682 and AS4020 (-5°C up to +50°C)
 - EPDM gasket acc. to EN 681-1 (0°C up to +50°C) by request
- Angular deflection of max. 8° per socket at installation (based on the middle of the range)
- Stainless steel A4 quality (AISI 316) Uni/Fiksers
- Stainless steel A4 quality (AISI 316) bolts, nuts and washers standard or A2 quality (AISI 304) by request
- Hygiene protection included DN50 - DN1025

Installation instruction:

- Read the user manual
- For restraint versions, on plastic pipes, the use of an insert stiffener (see accessories) is mandatory, check our technical information
- * DN350 & DN400 for plastic pipe materials = PN 10 bar water / MOP 5 bar gas

Note:

ID min. = minimum insertion depth

Reece Code	+GF+ WAGA NBR/A4	DN (mm)	Range 1 (mm)	Flange 3 (mm)	Drilling pattern	No. of bolt holes flange	a (mm)	b (mm)	ID min. (mm)	e (mm)	PN Water (bar)	MOP Gas (bar)	Weight (kg)
1026988	709355810	50	46 - 71	50	Table D	4	165 - 187	170	84	3xM12	16	8	4.700
1026989	709355812	65	63 - 90	65	Table D	4	170 - 193	191	84	3xM12	16	8	5.700
1026990	709355814	80	84 - 105	80	Table D	4	170 - 192	210	84	3xM12	16	8	6.600
1026991	709355817	100	104 - 132	100	Table D	4	173 - 199	241	90	3xM16	16	8	8.000
1026992	709355821	150	154 - 192	150	Table D	8	211 - 248	312	110	4xM16	16	8	14.200
1026993	709355826	200	192 - 232	200	Table D	8	221 - 258	371	110	6xM16	16	8	22.100
1026994	709355829	250	267 - 310	250	Table D	8	264 - 307	445	130	6xM20	16	8	32.600
1026995	709355833	300	315 - 356	300	Table D	12	293 - 331	495	130	8xM20	16	8	45.600
1026996	709455833	125	132 - 155	100	Table D	4	187 - 210	270	90	4xM16	16	8	9.800
1026997	709455839	125	132 - 155	150	Table D	8	187 - 210	285	90	4xM16	16	8	11.500
1026998	709455859	225	230 - 268	200	Table D	8	250 - 288	415	125	6xM20	16	8	29.300
1026999	709455881	225	230 - 268	250	Table D	8	216 - 254	415	125	6xM20	16	8	45.300


Certifications:

AS4020 - NBR & EPDM drinking water contact approved
WSAA – PA 1428
EN 14525:2022



Available at Reece. Call 1800 032 566 or visit reece.com.au/storefinder for your nearest store

Disclaimer:
All Reece trademarks and logos are owned by Reece Group Pty Ltd. All other brand or product names are trademarks or registered marks of their respective owners and displayed by agreement. Because we are continuously improving our products and services, Reece reserves the right to change specifications without prior notice.

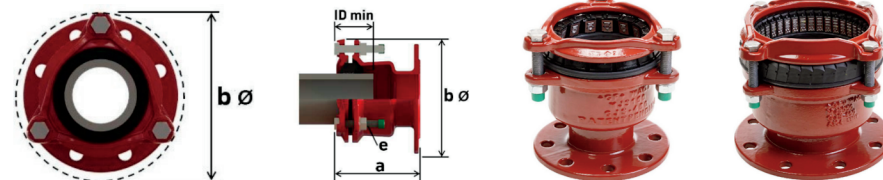

Water & Gas..... WAGA

One size fits and grips all